

[www.oberflex.com](http://www.oberflex.com)




ISO 9001  
BUREAU VERITAS  
Certification



# Deck d'Ober,

Boat deck jointed wood panelling






**Bathroom**

# Deck d'Ober,


Boat deck jointed wood panelling



**Dressing room**

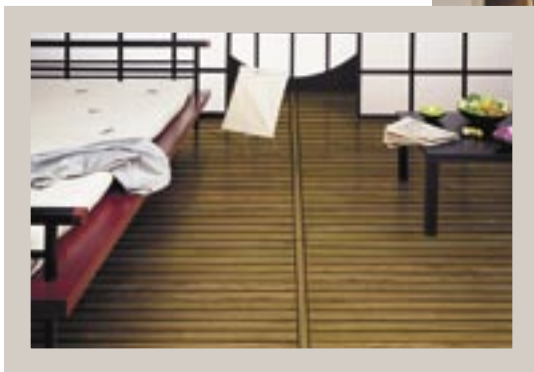

**Bedroom**





## Teak

Strips of 41 mm width  
Available in black or white joints

## Wenge

## Bubinga

## Doussie

Strips of 87 mm width • Available in black or white joints


## NOVELTIES



## Swimming pool



TEAK

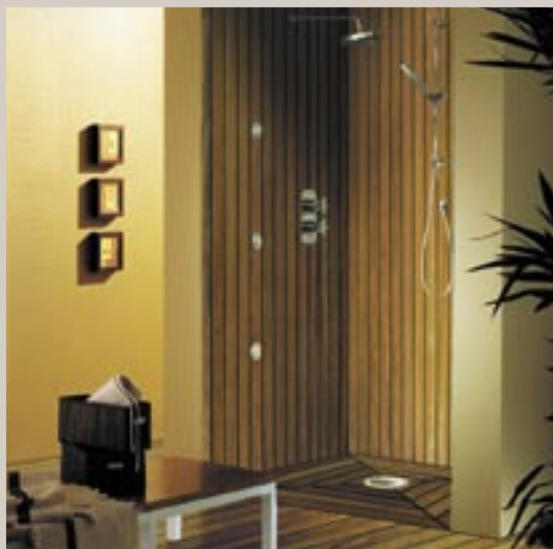

## Shower

## Characteristics

STRIPS 41 mm WIDTH	<b>Species:</b> solid teak (upon request: solid wenge, bubinga, doussie) <b>Standard lengths:</b> 1200 mm • 2000 mm (lengths on demand: 2200 mm • 2500 mm) <b>Standard widths:</b> 639 mm • 1283 mm
STRIPS 87 mm WIDTH	<b>Species:</b> solid wenge, bubinga, doussie <b>Standard length:</b> 2000 mm (For a length narrower than 2000 mm, please consult us) <b>Standard widths:</b> 639 mm • 1283 mm
SURFACE CONDITION	Product delivered unfinished, to be oiled
THICKNESS OF A STRIP	7,5 mm
JOINT TYPE	elastomer mastic glue
WIDTH OF THE JOINT	5 mm

## Additional products

**ACCESSORY STRIPS:** For the treatment of edges or making thresholds for doors, Oberflex can supply accessory strips in solid wood, length 2000 mm, width 41 or 87\*mm and thickness 7,5 mm.

### GLUES / MASTICS :

Oberflex can supply glues and mastics for gluing Deck d'Ober and making the joints (see the technical sheet).

\* Teak not available in 87 mm strip

## Additional information

DECK D'OBBER panels begin with a strip of wood and end with another strip of wood.

Deck d'Ober panels manufactured with 41 mm width solid wood strips can be used for curved surfaces: rounded bathtub surrounds, cladding of columns... (bending radius: 400 mm).

For outside applications or in very humid environment we only recommend the use of Teak wood.